

32W RECESSED LED PANEL

600 x 600 mm | OSRAM DRIVER

APPLICATIONS

- Recessed 600x600 Grid
- Retail
- Offices
- Communal areas
- Hospitals
- Schools

SPECIFICATION


- 32W, 2800 lm, 88 Lm/W
- CRI > .8
- CCT 5000K
- Osram driver
- Rated life 30,000 hrs
- IP20
- LM70 - 35,000

CONSTRUCTION

- White steel body
- Semi-gloss powder coated finish
- For 15-24mm exposed T ceilings
- Opal polycarbonate diffuser panels

OPTIONS (PLEASE CALL)

- Emergency (maintained 3 hours) version available.
- Dimming and sensors options available

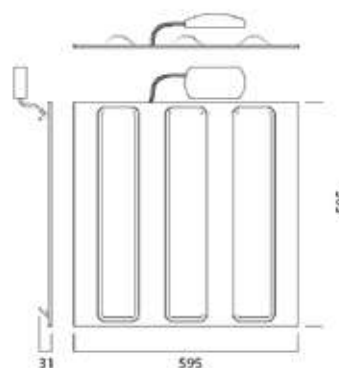

LUMiLife **OSRAM**

ORDER CODE	DESCRIPTION
ARB2-LED-850	32W LED Panel 600x600 5000K

 Designed for
LUMiLife Great Britain

